



PHONE MODEM SIMPLE ACTIVATION & SET UP INSTRUCTIONS. PLEASE READ CAREFULLY.


- 1 Call **855-746-5700** when you are ready to start the installation to activate the new phone modem.
You must call before you unplug your existing modem.
- 2 Remove new phone modem and cords from the box.
- 3 Unwrap the battery and insert into the battery compartment at the bottom of your new phone modem.

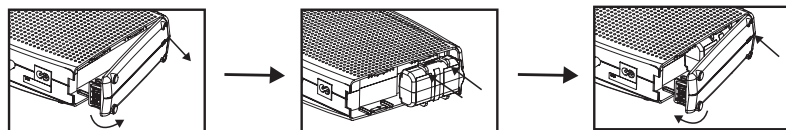


- 4 Disconnect your current phone modem — unplug power cord from your outlet.




- 5 Unplug phone cord from current modem and plug in to new modem.




- 6 Unplug the coax cable from current modem and plug in to new modem.



- 7 Unplug Ethernet cord from current modem and plug in to new modem. (You may also have the option of replacing the Ethernet cord as there is a new yellow cord in the box.)



- 8 Plug new power cord into your new modem and plug into your outlet.

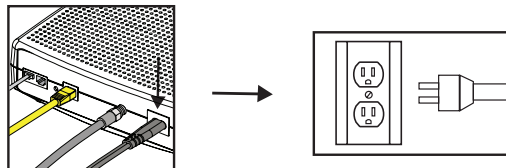

- 9 Wait 10 minutes for your new modem to activate.
- 10 Pick up your phone and listen for a dial tone.

If you have any issues, please call us at **855-746-5700** from your mobile phone. You do NOT need to return your current modem to Atlantic Broadband. Please safely dispose of the device.

Thank you for being an Atlantic Broadband customer.